



ASSEMBLY INSTRUCTION MODEL #CLT-7201-PN

REMOVABLE ARM

GLASS HOLDER

CAP NUT



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate

local electrical codes.



You will need 1 LED Module, 28 Watts Bulb included.

This fixture is Damp rated

TOP VIEW


GLASS

LED MODULE

SET SCREWS

FRAME


GLASS HOLDER

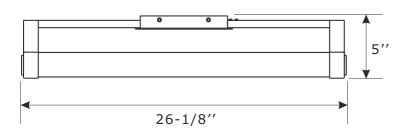

How to install


- Remove the removable arm from the frame by loosening the set screws and cap nut.
- 2. Slip the glass over the LED module and into the glass holder.
- Put the removable arm back by allowing the threaded nipple to protrude through the hole on the glass holder. Secure it with the cap nut. Tighten the set screws onto the frame using a screw driver.
- Place the mounting plate over the outlet box.
 Mark two points on the wall at the center of keyhole on the mounting plate.
- 5. Drill two holes at the marked points and insert the wall anchors.
- Place the mounting plate over the outlet box and secure it with outlet box screws. Insert the anchor screws into the wall anchor inside the wall and tighten it using a screw driver.
- 7. Install backplate onto the mounting plate, and secure with the mounting screws.

FRONT VIEW

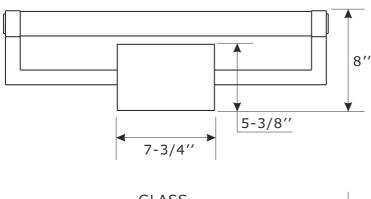

GLASS 2" 24-3/4"

SIDE VIEW







ASSEMBLY INSTRUCTION MODEL#CLT-7201-PN

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Mounting plate
- C. (1)-Backplate L7-3/4"xW5-3/8"xH1" #XRF7201PNBKP7.75IN
- D. (4)-Mounting screw
- E. (2)-Set screw
- F. (1)-Glass W2"xL24.75" #XRF7201GLA24.75IN
- G. (1)-Cap nut

