




LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #503-GA-SA

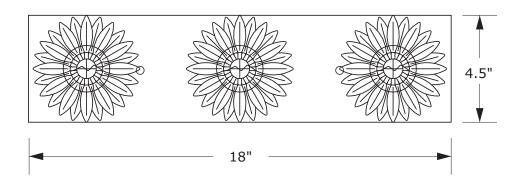

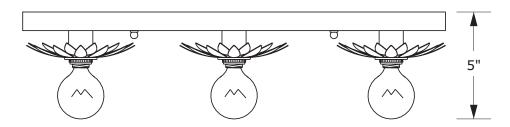

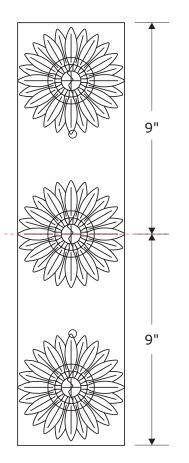



All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.





REQUIRED G16-1/2"

You will need 3 -Candelabra Base Bulb

40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE THIS FIXTURE IS DAMP RATED


How to install

- 1.Install the backplate onto the outlet box, and secure it with the ball nuts.(The leaves can be adjusted forward and backward to achieve the depth you prefer.)
- 2.Unscrew the socket ring from the socket, then put the metal leaf on the socket, and secure with socket ring.
- 3.Insert recommended bulb (not included).
- 4. The fixture can be mounted either horizontally and vertically.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.



PART NUMBER MODEL #503-GA-SA

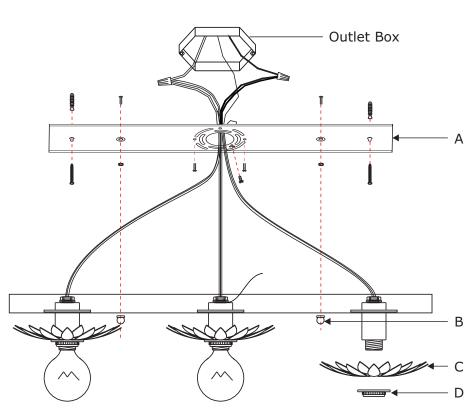

Part Number

- A. (1) Mounting Hardware Includes:
 - (1) Mounting Plate
 - (2) Wall Anchors
 - (2) Anchor Screws
 - (2) Machine Screws
 - (3) Wire Nuts
- B. (2) Ball Nut #XRE503GASABANUT
- C. (3) Leaf Assembly
- D. (3) Socket Ring

How to install the mounting plate:

- 1.Put the mounting plate over the outlet box and mark the two points on the wall at the center of key holes.
- 2.Drill the holes at the marked points and insert the wall anchor inside the hole drilled.
- 3.Place the mounting plate over the outlet box and secure it with the machine screws, insert the wall anchor screws inside the wall anchors in the wall and tighten it.